

SANGAMON COUNTY, ILLINOIS

ORDINANCE
NUMBER 20-4

**AN ORDINANCE APPROVING A PROPOSAL FROM KINNEY CONTRACTORS,
INC. FOR GLENWOOD PARK CULVERT REPLACEMENT**

DAVE KIMSEY, Village President
AMY DAHLKAMP, Village Clerk

KRISTEN CHIARO
ANDREW DETMERS
BRETT GERGER
RYAN MANN
MATT MAU
PAUL SCHERSCHEL
Village Trustees

Published in pamphlet form by authority of the President and Board of Trustees of the Village of Chatham
on January 14th, 2020

Sorling Northrup – 1 N. Old State Capitol Plaza, Suite 200, Springfield, IL 62705

ORDINANCE NO. 20 - 1

**AN ORDINANCE APPROVING A PROPOSAL FROM KINNEY CONTRACTORS,
INC. FOR GLENWOOD PARK CULVERT REPLACEMENT**

WHEREAS, the Village of Chatham (hereinafter “Village”) is an Illinois Municipal Corporation existing and operating under the Illinois Municipal Code and the laws of the State of Illinois; and

WHEREAS, the Village of Chatham desires replace a culvert running beneath Carefree Dr. in Glenwood Park; and

WHEREAS, the Glenwood Park Home Owners Association has agreed to pay for over half of the construction costs of the improvements; and

WHEREAS, Kinney Contractors, Inc. submitted a bid to the Village of Chatham and Glenwood Park Home Owners Association for the Glenwood Park Culvert Replacement; a true and correct copy of which is attached hereto as **Exhibit A**; and

WHEREAS, pursuant to the Quote, the Village of Chatham would pay \$32,019.00 and the Glenwood Park Home Owners Association would pay \$36,200.00; and,

WHEREAS, the Village wishes to waive any formal bidding requirement and accept the Quote provided by Kinney Contractors, Inc.; and

WHEREAS, the President and Board of Trustees of the Village have determined it to be in the best interest of the Village to accept the Quote of Kinney Contractors, Inc. attached hereto as **Exhibit A**.

NOW THEREFORE, BE IT ORDAINED by the President and Board of Trustees of the Village of Chatham, Sangamon County, Illinois, as follows:

Section 1. Recitals. The foregoing recitals shall be and are hereby incorporated into and made a part of this Ordinance as if fully set forth in this Section 1.

Section 2. Acceptance of Quote. The Village of Chatham – Glenwood Park Culvert Replacement Quote attached hereto as **Exhibit A** shall be, and is hereby, approved. The Village President and Clerk are hereby authorized to execute any documents as required by law or necessary to complete the actions contemplated therein.

Section 3. Severability. In the event that any section, clause, provision, or part of this Ordinance shall be found and determined to be invalid by a court of competent jurisdiction, all valid parts that are severable from the invalid parts shall remain in full force and effect.


Section 4. Repeal and Savings Clause. All Ordinances or parts of Ordinances in conflict herewith are hereby repealed; provided, however, that nothing herein contained shall affect any rights, action, or causes of action which shall have accrued to the Village of Chatham prior to the effective date of this Ordinance.

Section 5. Effectiveness. This Ordinance shall be in full force and effect from and after its passage, approval, and publication in pamphlet form as provided by law.

SO ORDAINED this 14th day of January, 2020, at Chatham, Sangamon County, Illinois.


	AYE	NAY	ABSTAIN	ABSENT
KRISTEN CHIARO	X			
ANDREW DETMERS	X			
BRETT GERGER	X			
RYAN MANN	X			
MATT MAU	X			
PAUL SCHERSCHEL	X			
DAVE KIMSEY				X
TOTAL	6	0		1

APPROVED this 14th day of January, 2020.

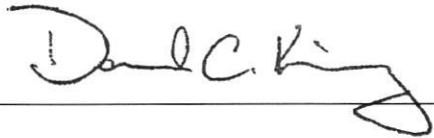

Village President

ATTEST:

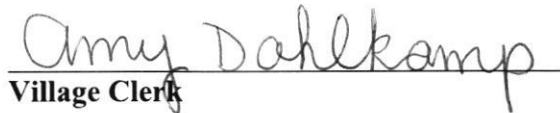

Village Clerk

EXHIBIT A
VILLAGE OF CHATHAM – GLENWOOD PARK CULVERT REPLACEMENT

Village of Chatham - Glenwood Park Culvert Replacement



Kinney Contractors Inc

19342 E Frontage Rd

Raymond IL 62560

Contact: Rich Miller

Phone: 217-229-3322

Fax: 217-229-3609

Quote To: Jim Michael/Brenton Davis

Job Name: Glenwood Park Subdivison

Date of Plans: 11/26/19

Phone: 217-787-8050/217-483-9457


Revision Date:

Fax:

ITEM	DESCRIPTION	QUANTITY	UNIT	UNIT PRICE	AMOUNT
Village of Chatham					
	Storm Sewer Removal 12"	40.00	LF	36.00	1,440.00
	Storm Sewer Removal 15"	6.00	LF	100.00	600.00
	Remove Existing Inlet	2.00	EA	380.00	760.00
	Remove Existing Manhole	1.00	EA	510.00	510.00
	Inlet Type A with Type 9 F&G	2.00	EA	1,830.00	3,660.00
	Manhole Type A 4' with Type 1 F&CL	2.00	EA	2,655.00	5,310.00
	Storm Sewer Class A, Type 1 12"	27.00	LF	137.00	3,699.00
	Concrete Gutter	40.00	LF	86.00	3,440.00
	8" PCC Jointed Pavement	60.00	SY	185.00	11,100.00
	Mobilization	1.00	LS	1,500.00	1,500.00
	Village of Chatham Total				\$32,019.00
Glenwood Park HOA					
	Storm Sewer Removal 42" EQRS	146.00	LF	15.00	2,190.00
	Remove Existing 42" MES	1.00	EA	400.00	400.00
	Storm Sewer Removal 78"	7.00	LF	86.00	602.00
	Remove Existing Timber Retaining Wall	25.00	LF	38.00	950.00
	Remove Existing Concrete Gutter	40.00	LF	30.00	1,200.00
	Pavement Removal	60.00	SY	27.50	1,650.00
	78" Riser with Trash Rack	1.00	EA	8,100.00	8,100.00
	12" CMP	4.00	LF	205.00	820.00
	15" CMP	4.00	LF	210.00	840.00
	Pipe Culvert, Class C Type 2 EQRS 42"	146.00	LF	113.00	16,498.00
	Metal End Section EQRS 42"	1.00	EA	1,450.00	1,450.00
	Mobilization	1.00	LS	1,500.00	1,500.00
	Glenwood Park HOA Total				\$36,200.00
GRAND TOTAL					\$68,219.00

NOTES:

- Bid Exclusions/Clarifications
- No bond or AGC Dues.
 - No permits.
 - Proposal is all inclusive unless negotiated with KCI prior to bid. Post bid may result in repricing of our proposal.
 - Sales tax on all permanent material has been excluded from our proposal.
 - Any utility relocations or adjustments will be by others.
 - This proposal excludes any overtime. Overtime if required to meet project deadlines or project acceleration will be agreed upon prior to contract signing. By definition a standard work week will be considered to be Monday through Friday 7:00 AM to 3:30 PM.
 - All additional work will be mutually agreed upon in writing prior to performing such work.
 - No testing of any sort.
 - All construction layout by others.
 - Engineering or engineering fees are excluded from this proposal.
 - Any subgrade repair or remediation or soil amending has been excluded from our proposal. I.e. lime stabilization or modification and cement stabilization or modification.
 - All QC/QA and compaction testing by others.
 - Pricing includes winter concrete and winter protection.
 - Ground heating or heaters are excluded.
 - This proposal excludes any earthwork including any fine grading or backfilling and site restoration.
 - The 8" PCC Pavement includes a 6" Aggregate Sub-base.
 - This quote and our written conditions attached will become a part of the contract documents.
 - Traffic control and flagging have been excluded from this proposal.
 - This proposal excludes any handling, hauling or disposing of any hazardous or non hazardous materials.
 - Our proposal excludes any well points.
 - This proposal includes 1 mobilization. Additional mobilizations will be \$750.00 per each piece.
 - Payment terms and conditions are as follows: net payments due (30) days from date of invoice. Late or delinquent payments may result in monthly a finance charge of 1.5%.
 - Proposal is valid for 30 days after bid date.
 - All utility work is excluded from our proposal and shall be performed by others. Utility work shall be defined as gas, water, sewer, electric, heating and air conditioning and gas.
 - Bid proposal based on plan sheets provided. No special provisions were provided and therefore, will not apply to this proposal.

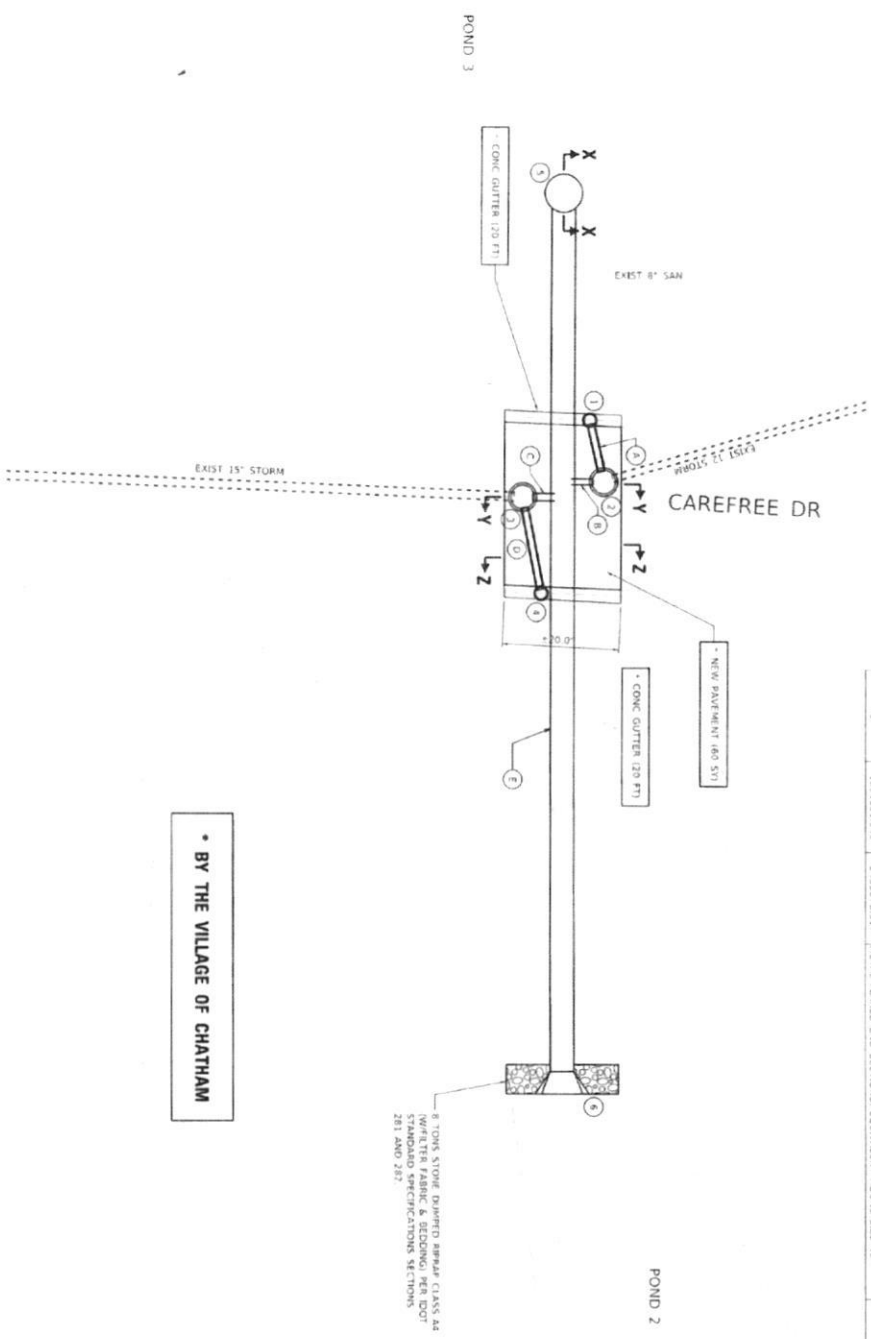

STRUCTURE NO	NORTHING	EASTING	STRUCTURE TYPE	INVERTS
1	1094814.884	2434973.772	INLETS, TYPE A, TYPE 9 FRAME AND GRATE	584.54 EX 579.92 12'-5"
2	1094820.996	2434982.711	MANHOLES, TYPE A, 4-QUARTER, TYPE 1 FRAME, CLOSED LID	584.90 EX 579.88 15'-5"
3	1094809.011	2434990.258	MANHOLES, TYPE A, 4-QUARTER, TYPE 1 FRAME, CLOSED LID	584.47 EX 579.88 15'-5"
4	1094818.055	2435004.197	INLETS, TYPE A, TYPE 9 FRAME AND GRATE	583.90 EX 577.20 42'-8 1/2"
5	1094856.376	2434979.667	78" DIA. RISER	577.20 42'-8 1/2"
6	1094851.540	2435078.317	METAL FLARED END SECTIONS, COMBINATION ROUND-SIZE 42"	576.76 42'-8 1/2"

• BY THE VILLAGE OF CHATHAM

PIPE NO.	FROM	TO	PIPE TYPE	LENGTH (ft)	SCOUR %	US INV.	DS INV.
A	1	2	STORM SEWERS, CLASS A, TYPE 1 12"	12	1%	582.04	581.92
B	2	F	15" CHD	4	1%	578.00	578.00
C	3	F	15" CHD	4	1%	578.07	578.04
D	4	3	STORM SEWERS, CLASS A, TYPE 1 12"	15	1%	581.97	581.82
E	RISER	FES	PIPE CULVERTS, CLASS C, TYPE 2, EQUIVALENT ROUND-SIZE 42"	148	0.3%	577.20	576.76

whks CONSULTING ENGINEERS

PROJECT: GLENWOOD PARK CULVERT REPLACEMENT

SHEET: 1 OF 1

DATE: 10/20/21

SCALE: 1" = 20'

COMPUTER: 10/20/21

DESIGNED BY: [Name]

CHECKED BY: [Name]

DATE: [Date]

SCALE: 1" = 20'

SHEET: 1 OF 1

DATE: 10/20/21

